

# TRIUMPH® 4315

Dependable semi-automatic tabletop cutter with electric blade drive, manual fast-action clamp, and EASY CUT blade activation.

Cutting width, inches	16 7/8
Cutting height, inches	1 1/2
Narrow cut, inches	1 3/8
Length behind blade, inches	17



optional stand



optional cabinet

Comprehensive SCS safety package: patented EASY CUT electronic blade activation bars for true two-hand operation; transparent, electronically controlled front safety guard; transparent safety cover on rear table; main switch and safety lock with key; 24 volt controls (low voltage); patented IDEAL safety drive; automatic blade return from every position; disc brake for instant blade stop; blade changing device covers cutting edge of blade; blade depth adjustment from outside of machine; blade and cutting stick can be changed without removing covers.

Electric blade drive. Spindle-guided back gauge with calibrated crank. Front table digital display (cm or inches) for precise back gauge positioning. Bright, LED optical cutting line. Patented lever-activated, fast-action clamp. Precision side guide. High quality, German steel blade. Solid steel blade carrier and adjustable blade guides. All-metal construction. Optional stand, or cabinet with storage shelves.

## Specifications

Electrical requirements	115 V, 60 Hz
Motor output, horsepower	3/5
Dimensions (D x W x H), inches	34 1/4 x 25 x 14 <sup>1</sup>
Shipping weight, pounds	191 <sup>2</sup>

<sup>1</sup>height with stand is 42 3/4 inches, height with cabinet is 42 1/2 inches


<sup>2</sup>shipping weight with stand is 217 pounds, shipping weight with cabinet is 286 pounds

[WWW.MBMCORP.COM](http://WWW.MBMCORP.COM)  
TEL: 800-223-2508

[WWW.IDEAL-MBM.COM](http://WWW.IDEAL-MBM.COM)  
TEL: 800-387-2528

# TRIUMPH® 4315

## Features

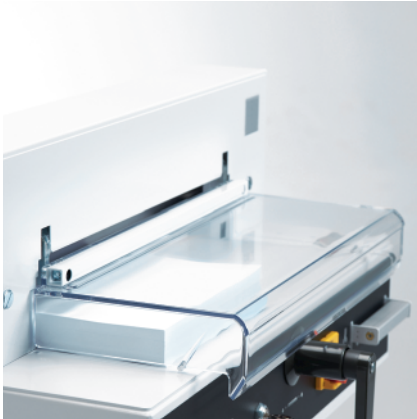

### TRANSPARENT SAFETY GUARD

A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.



### BACK GAUGE HAND CRANK

The calibrated hand crank is used to set the spindle-guided back gauge.




### EASY CUT BLADE ACTIVATION BARS

Patented EASY CUT blade activation bars ensure true, two-hand operation.



### DIGITAL DISPLAY

The LED measurement display ensures precise positioning of the back gauge and can be set to cm or inches.

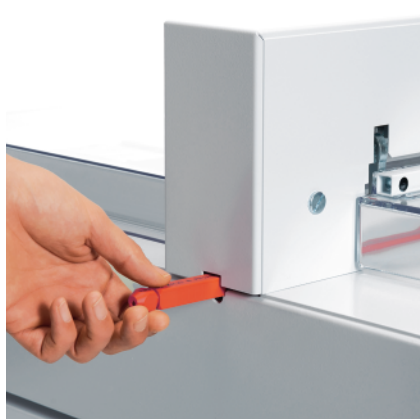

### EASY CUTTING STICK CHANGE

Cutting sticks can be turned or changed easily from the outside of the machine—no tools are required.



### PATENTED FAST-ACTION CLAMP

After inserting the paper stack, throw the lever on the fast-action clamp to tighten—then cut.

